



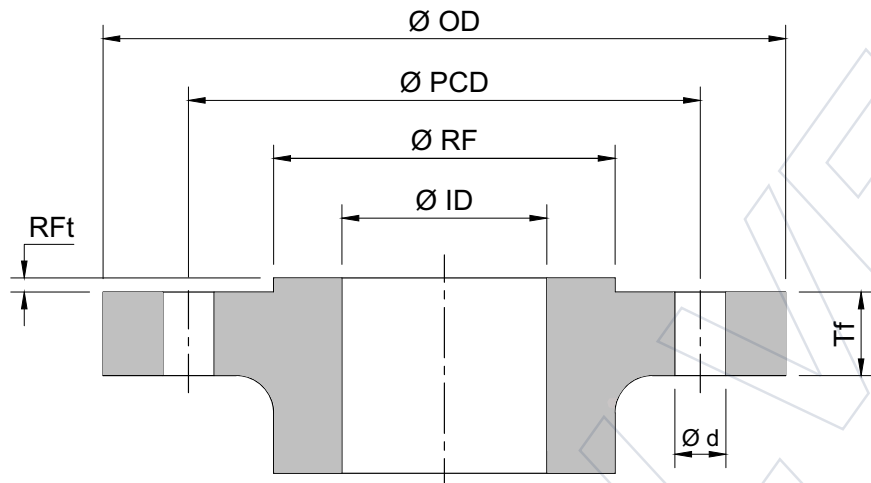


## ASME B16.5 Class 150

| ØID |     | ØOD |       | ØPCD  |       | Tf   |      | Ød    |      | ØRF   |       | RFt |      | Number of holes |
|-----|-----|-----|-------|-------|-------|------|------|-------|------|-------|-------|-----|------|-----------------|
| DN  | NPS | mm  | inch  | mm    | inch  | mm   | inch | mm    | inch | mm    | inch  | mm  | inch |                 |
| 15  | ½   | 90  | 3.50  | 60.3  | 2.38  | 8.0  | 0.31 | 15.88 | 5/8  | 35.0  | 1.38  | 2   | 0.06 | 4               |
| 20  | ¾   | 100 | 3.88  | 69.9  | 2.75  | 8.9  | 0.34 | 15.88 | 5/8  | 43.0  | 1.69  | 2   | 0.06 | 4               |
| 25  | 1   | 110 | 4.25  | 79.4  | 3.12  | 9.6  | 0.38 | 15.88 | 5/8  | 51.0  | 2.00  | 2   | 0.06 | 4               |
| 32  | 1¼  | 115 | 4.62  | 88.9  | 3.50  | 11.2 | 0.44 | 15.88 | 5/8  | 63.5  | 2.50  | 2   | 0.06 | 4               |
| 40  | 1½  | 125 | 5.00  | 98.4  | 3.88  | 12.7 | 0.50 | 15.88 | 5/8  | 73.0  | 2.88  | 2   | 0.06 | 4               |
| 50  | 2   | 150 | 6.00  | 120.7 | 4.75  | 14.3 | 0.56 | 19.00 | ¾    | 92.0  | 3.62  | 2   | 0.06 | 4               |
| 65  | 2½  | 180 | 7.00  | 139.7 | 5.50  | 15.9 | 0.62 | 19.00 | ¾    | 105.0 | 4.12  | 2   | 0.06 | 4               |
| 80  | 3   | 190 | 7.50  | 152.4 | 6.00  | 17.5 | 0.69 | 19.00 | ¾    | 127.0 | 5.00  | 2   | 0.06 | 4               |
| 100 | 4   | 230 | 9.00  | 190.5 | 7.50  | 22.3 | 0.88 | 19.00 | ¾    | 157.0 | 6.19  | 2   | 0.06 | 8               |
| 125 | 5   | 255 | 10.00 | 215.9 | 8.50  | 22.3 | 0.88 | 22.50 | 7/8  | 186.0 | 7.31  | 2   | 0.06 | 8               |
| 150 | 6   | 280 | 11.00 | 241.3 | 9.50  | 23.9 | 0.94 | 22.50 | 7/8  | 216.0 | 8.50  | 2   | 0.06 | 8               |
| 200 | 8   | 345 | 13.50 | 298.5 | 11.75 | 27.0 | 1.06 | 22.50 | 7/8  | 270.0 | 10.62 | 2   | 0.06 | 8               |
| 250 | 10  | 405 | 16.00 | 362.0 | 14.25 | 28.6 | 1.12 | 25.50 | 7/8  | 324.0 | 12.75 | 2   | 0.06 | 12              |
| 300 | 12  | 485 | 19.00 | 431.8 | 17.00 | 30.2 | 1.19 | 25.50 | 1    | 381.0 | 15.00 | 2   | 0.06 | 12              |
| 350 | 14  | 535 | 21.00 | 476.3 | 18.75 | 33.4 | 1.31 | 28.50 | 1/18 | 413.0 | 16.25 | 2   | 0.06 | 12              |
| 400 | 16  | 595 | 23.50 | 539.8 | 21.25 | 35.0 | 1.38 | 28.50 | 1/18 | 470.0 | 18.50 | 2   | 0.06 | 16              |
| 450 | 18  | 635 | 25.00 | 577.9 | 22.75 | 38.1 | 1.50 | 31.75 | 1/14 | 533.0 | 21.00 | 2   | 0.06 | 16              |
| 500 | 20  | 700 | 27.50 | 635.0 | 25.00 | 41.3 | 1.62 | 31.75 | 1/14 | 584.0 | 23.00 | 2   | 0.06 | 20              |
| 550 | 22  | 750 | 29.50 | 692.2 | 27.25 | 44.5 | 1.75 | 35.00 | 1/38 | 641.5 | 25.25 | 2   | 0.06 | 20              |
| 600 | 24  | 815 | 32.00 | 749.3 | 29.50 | 46.1 | 1.81 | 35.00 | 1/38 | 692.0 | 27.25 | 2   | 0.06 | 20              |

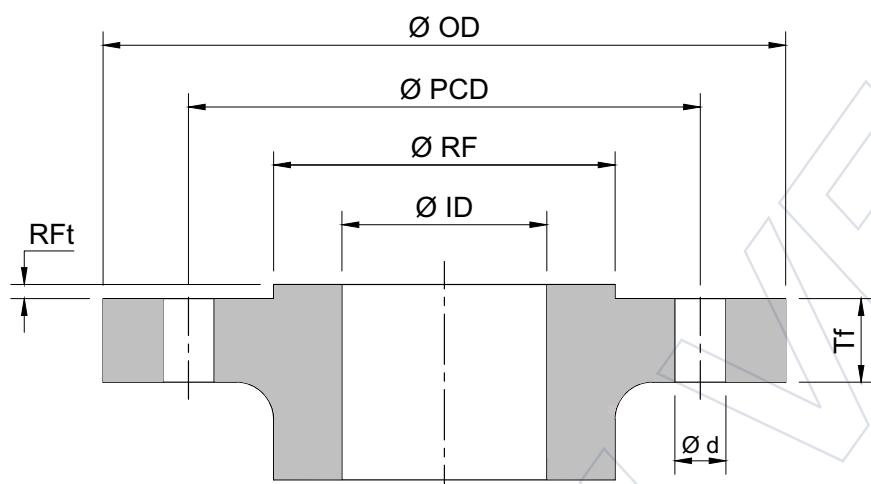


## ASME B16.5 | Class 300

| $\varnothing ID$ |     | $\varnothing OD$ |       | $\varnothing PCD$ |       | $T_f$ |      | $\varnothing d$ |      | $\varnothing RF$ |       | $Rf_t$ |      | Number of holes |
|------------------|-----|------------------|-------|-------------------|-------|-------|------|-----------------|------|------------------|-------|--------|------|-----------------|
| DN               | NPS | mm               | inch  | mm                | inch  | mm    | inch | mm              | inch | mm               | inch  | mm     | inch |                 |
| 15               | ½   | 95               | 3.75  | 66.7              | 2.62  | 12.7  | 0.50 | 15.88           | 5/8  | 35.0             | 1.38  | 2      | 0.06 | 4               |
| 20               | ¾   | 115              | 4.62  | 82.6              | 3.25  | 14.3  | 0.56 | 19.00           | ¾    | 43.0             | 1.69  | 2      | 0.06 | 4               |
| 25               | 1   | 125              | 4.88  | 88.9              | 3.50  | 15.9  | 0.62 | 19.00           | ¾    | 51.0             | 2.00  | 2      | 0.06 | 4               |
| 32               | 1¼  | 135              | 5.25  | 98.4              | 3.88  | 17.5  | 0.69 | 19.00           | ¾    | 63.5             | 2.50  | 2      | 0.06 | 4               |
| 40               | 1½  | 155              | 6.12  | 114.3             | 4.50  | 19.1  | 0.75 | 22.50           | 7/8  | 73.0             | 2.88  | 2      | 0.06 | 4               |
| 50               | 2   | 165              | 6.50  | 127.0             | 5.00  | 20.7  | 0.81 | 19.00           | ¾    | 92.0             | 3.62  | 2      | 0.06 | 8               |
| 65               | 2½  | 190              | 7.50  | 149.2             | 5.88  | 23.9  | 0.94 | 22.50           | 7/8  | 105.0            | 4.12  | 2      | 0.06 | 8               |
| 80               | 3   | 210              | 8.25  | 168.3             | 6.62  | 27.0  | 1.06 | 22.50           | 7/8  | 127.0            | 5.00  | 2      | 0.06 | 8               |
| 100              | 4   | 255              | 10.00 | 200.0             | 7.88  | 30.2  | 1.19 | 22.50           | 7/8  | 157.0            | 6.19  | 2      | 0.06 | 8               |
| 125              | 5   | 280              | 11.00 | 235.0             | 9.25  | 33.4  | 1.31 | 22.50           | 7/8  | 186.0            | 7.31  | 2      | 0.06 | 8               |
| 150              | 6   | 320              | 12.50 | 269.9             | 10.62 | 35.0  | 1.38 | 22.50           | 7/8  | 216.0            | 8.50  | 2      | 0.06 | 12              |
| 200              | 8   | 380              | 15.00 | 330.2             | 13.00 | 39.7  | 1.56 | 25.50           | 1    | 270.0            | 10.62 | 2      | 0.06 | 12              |
| 250              | 10  | 445              | 17.50 | 387.4             | 15.25 | 46.1  | 1.81 | 28.50           | 1/18 | 324.0            | 12.75 | 2      | 0.06 | 16              |
| 300              | 12  | 520              | 20.50 | 450.8             | 17.75 | 49.3  | 1.94 | 31.75           | 1/14 | 381.0            | 15.00 | 2      | 0.06 | 16              |
| 350              | 14  | 585              | 23.00 | 514.4             | 20.25 | 52.4  | 2.06 | 31.75           | 1/14 | 413.0            | 16.25 | 2      | 0.06 | 20              |
| 400              | 16  | 650              | 25.50 | 571.5             | 22.50 | 55.6  | 2.19 | 35.00           | 1/38 | 470.0            | 18.50 | 2      | 0.06 | 20              |
| 450              | 18  | 710              | 28.00 | 628.6             | 24.75 | 58.8  | 2.31 | 35.00           | 1/38 | 533.0            | 21.00 | 2      | 0.06 | 24              |
| 500              | 20  | 775              | 30.50 | 685.8             | 27.00 | 62.0  | 2.44 | 35.00           | 1/38 | 584.0            | 23.00 | 2      | 0.06 | 24              |
| 550              | 22  | 840              | 33.00 | 743.0             | 29.25 | 65.1  | 2.56 | 41.50           | 1/58 | 641.5            | 25.25 | 2      | 0.06 | 24              |
| 600              | 24  | 915              | 36.00 | 812.8             | 32.00 | 68.3  | 2.69 | 41.50           | 1/58 | 692.0            | 27.25 | 2      | 0.06 | 24              |

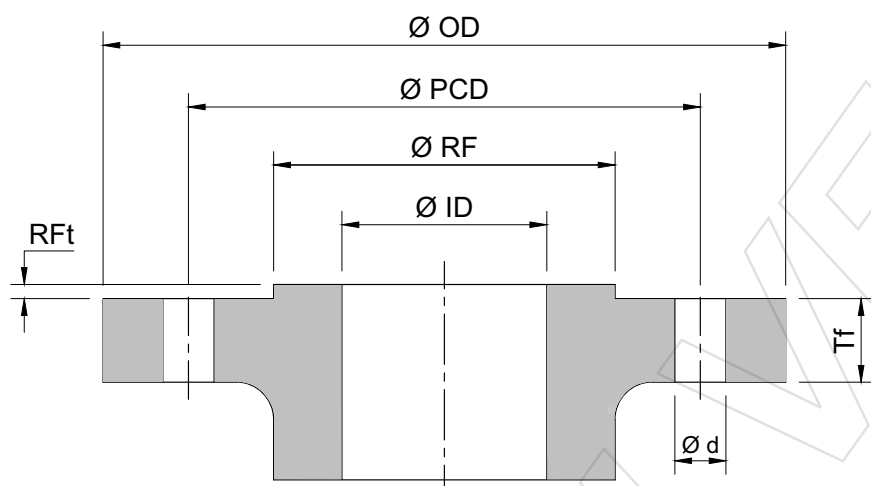


## ASME B16.5 | Class 600

| ØID |     | ØOD |       | ØPCD  |       | Tf    |      | Ød    |      | ØRF   |       | Rf |      | Number of holes |
|-----|-----|-----|-------|-------|-------|-------|------|-------|------|-------|-------|----|------|-----------------|
| DN  | NPS | mm  | inch  | mm    | inch  | mm    | inch | mm    | inch | mm    | inch  | mm | inch |                 |
| 15  | ½   | 95  | 3.75  | 66.7  | 2.62  | 14.3  | 0.56 | 15.88 | ⅝    | 35.0  | 1.38  | 7  | 0.25 | 4               |
| 20  | ¾   | 115 | 4.62  | 82.6  | 3.25  | 15.9  | 0.62 | 19.00 | ¾    | 43.0  | 1.69  | 7  | 0.25 | 4               |
| 25  | 1   | 125 | 4.88  | 88.9  | 3.50  | 17.5  | 0.69 | 19.00 | ¾    | 51.0  | 2.00  | 7  | 0.25 | 4               |
| 32  | 1¼  | 135 | 5.25  | 98.4  | 3.88  | 20.7  | 0.81 | 19.00 | ¾    | 63.5  | 2.50  | 7  | 0.25 | 4               |
| 40  | 1½  | 155 | 6.12  | 114.3 | 4.50  | 22.3  | 0.88 | 22.50 | ⅞    | 73.0  | 2.88  | 7  | 0.25 | 4               |
| 50  | 2   | 165 | 6.50  | 127.0 | 5.00  | 25.4  | 1.00 | 19.00 | ¾    | 92.0  | 3.62  | 7  | 0.25 | 8               |
| 65  | 2½  | 190 | 7.50  | 149.2 | 5.88  | 28.6  | 1.12 | 22.50 | ⅞    | 105.0 | 4.12  | 7  | 0.25 | 8               |
| 80  | 3   | 210 | 8.25  | 168.3 | 6.62  | 31.8  | 1.25 | 22.50 | ⅞    | 127.0 | 5.00  | 7  | 0.25 | 8               |
| 100 | 4   | 275 | 10.75 | 215.9 | 8.50  | 38.1  | 1.50 | 25.50 | 1    | 157.0 | 6.19  | 7  | 0.25 | 8               |
| 125 | 5   | 330 | 13.00 | 266.7 | 10.50 | 44.5  | 1.75 | 28.50 | 1⅛   | 186.0 | 7.31  | 7  | 0.25 | 8               |
| 150 | 6   | 355 | 14.00 | 292.1 | 11.50 | 47.7  | 1.88 | 28.50 | 1⅛   | 216.0 | 8.50  | 7  | 0.25 | 12              |
| 200 | 8   | 420 | 16.50 | 349.2 | 13.75 | 55.6  | 2.19 | 31.75 | 1¼   | 270.0 | 10.62 | 7  | 0.25 | 12              |
| 250 | 10  | 510 | 20.00 | 431.8 | 17.00 | 63.5  | 2.50 | 35.00 | 1⅜   | 324.0 | 12.75 | 7  | 0.25 | 16              |
| 300 | 12  | 560 | 22.00 | 489.0 | 19.25 | 66.7  | 2.62 | 35.00 | 1⅜   | 381.0 | 15.00 | 7  | 0.25 | 20              |
| 350 | 14  | 605 | 23.75 | 527.0 | 20.75 | 69.9  | 2.75 | 38.00 | 1½   | 413.0 | 16.25 | 7  | 0.25 | 20              |
| 400 | 16  | 685 | 27.00 | 603.2 | 23.75 | 76.2  | 3.00 | 41.50 | 1⅝   | 470.0 | 18.50 | 7  | 0.25 | 20              |
| 450 | 18  | 745 | 29.25 | 654.0 | 25.75 | 82.6  | 3.25 | 45.00 | 1¾   | 533.0 | 21.00 | 7  | 0.25 | 20              |
| 500 | 20  | 815 | 32.00 | 723.9 | 28.50 | 88.9  | 3.50 | 45.00 | 1¾   | 584.0 | 23.00 | 7  | 0.25 | 24              |
| 550 | 22  | 870 | 34.25 | 777.7 | 30.62 | 95.2  | 3.75 | 48.00 | 1⅞   | 641.5 | 25.25 | 7  | 0.25 | 24              |
| 600 | 24  | 940 | 37.00 | 838.2 | 33.00 | 101.6 | 4.00 | 51.00 | 2    | 692.0 | 27.25 | 7  | 0.25 | 24              |

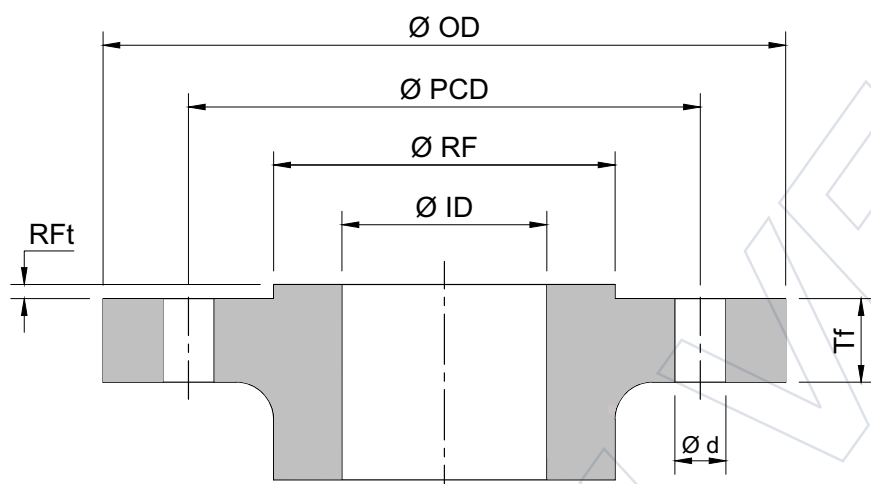


## ASME B16.5 | Class 900

| ØID |     | ØOD  |       | ØPCD  |       | Tf    |      | Ød    |       | ØRF   |       | RFt |      | Number of holes |
|-----|-----|------|-------|-------|-------|-------|------|-------|-------|-------|-------|-----|------|-----------------|
| DN  | NPS | mm   | inch  | mm    | inch  | mm    | inch | mm    | inch  | mm    | inch  | mm  | inch |                 |
| 15  | ½   | 120  | 4.75  | 82.6  | 3.25  | 22.3  | 0.88 | 22.50 | 7/8   | 35.0  | 1.38  | 7   | 0.25 | 4               |
| 20  | ¾   | 130  | 5.12  | 88.9  | 3.50  | 25.4  | 1.00 | 22.50 | 7/8   | 43.0  | 1.69  | 7   | 0.25 | 4               |
| 25  | 1   | 150  | 5.88  | 101.6 | 4.00  | 28.6  | 1.12 | 25.50 | 1     | 51.0  | 2.00  | 7   | 0.25 | 4               |
| 32  | 1¼  | 160  | 6.25  | 111.1 | 4.38  | 28.6  | 1.12 | 25.50 | 1     | 63.5  | 2.50  | 7   | 0.25 | 4               |
| 40  | 1½  | 180  | 7.00  | 123.8 | 4.88  | 31.8  | 1.25 | 28.50 | 1 1/8 | 73.0  | 2.88  | 7   | 0.25 | 4               |
| 50  | 2   | 215  | 8.50  | 165.1 | 6.50  | 38.1  | 1.50 | 25.50 | 1     | 92.0  | 3.62  | 7   | 0.25 | 8               |
| 65  | 2½  | 245  | 9.62  | 190.5 | 7.50  | 41.3  | 1.62 | 28.50 | 1 1/8 | 105.0 | 4.12  | 7   | 0.25 | 8               |
| 80  | 3   | 240  | 9.50  | 190.5 | 7.50  | 38.1  | 1.50 | 25.50 | 1     | 127.0 | 5.00  | 7   | 0.25 | 8               |
| 100 | 4   | 290  | 11.50 | 235.0 | 9.25  | 44.5  | 1.75 | 31.75 | 1 1/4 | 157.0 | 6.19  | 7   | 0.25 | 8               |
| 125 | 5   | 350  | 13.75 | 279.4 | 11.00 | 50.8  | 2.00 | 35.00 | 1 3/8 | 186.0 | 7.31  | 7   | 0.25 | 8               |
| 150 | 6   | 380  | 15.00 | 317.5 | 12.50 | 55.6  | 2.19 | 31.75 | 1 1/4 | 216.0 | 8.50  | 7   | 0.25 | 12              |
| 200 | 8   | 470  | 18.50 | 393.7 | 15.50 | 63.5  | 2.50 | 38.00 | 1½    | 270.0 | 10.62 | 7   | 0.25 | 12              |
| 250 | 10  | 545  | 21.50 | 469.9 | 18.50 | 69.9  | 2.75 | 38.00 | 1 ½   | 324.0 | 12.75 | 7   | 0.25 | 16              |
| 300 | 12  | 610  | 24.00 | 533.4 | 21.00 | 79.4  | 3.12 | 38.00 | 1 ½   | 381.0 | 15.00 | 7   | 0.25 | 20              |
| 350 | 14  | 640  | 25.25 | 558.8 | 22.00 | 85.8  | 3.38 | 41.50 | 1 5/8 | 413.0 | 16.25 | 7   | 0.25 | 20              |
| 400 | 16  | 705  | 27.75 | 616.0 | 24.25 | 88.9  | 3.50 | 44.50 | 1 ¾   | 470.0 | 18.50 | 7   | 0.25 | 20              |
| 450 | 18  | 785  | 31.00 | 685.8 | 27.00 | 101.6 | 4.00 | 51.00 | 2     | 533.0 | 21.00 | 7   | 0.25 | 20              |
| 500 | 20  | 855  | 33.75 | 749.3 | 29.50 | 108.0 | 4.25 | 54.00 | 2 1/8 | 584.0 | 23.00 | 7   | 0.25 | 20              |
| 600 | 24  | 1040 | 41.00 | 901.7 | 35.50 | 139.7 | 5.50 | 66.50 | 2 5/8 | 692.0 | 27.25 | 7   | 0.25 | 20              |

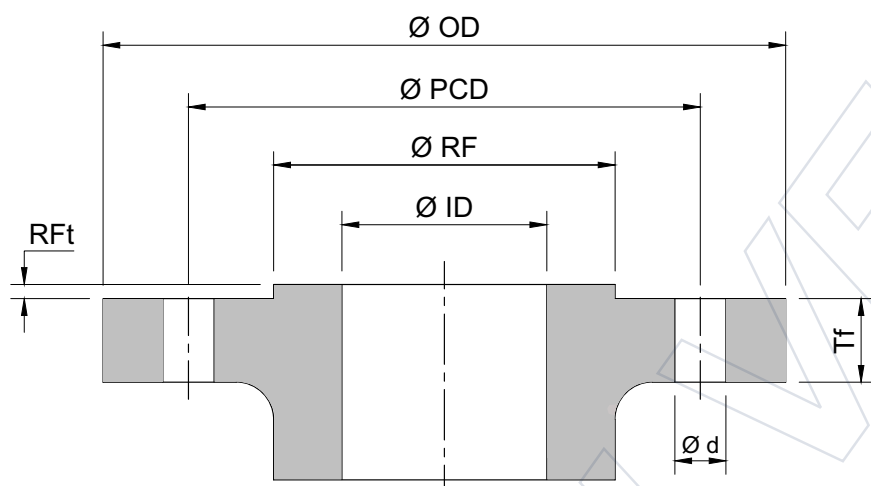

## ASME B16.5 | Class 1500

| ØID |     | ØOD  |       | ØPCD  |       | Tf    |      | Ød    |       | ØRF   |       | Rf |      | Number of holes |
|-----|-----|------|-------|-------|-------|-------|------|-------|-------|-------|-------|----|------|-----------------|
| DN  | NPS | mm   | inch  | mm    | inch  | mm    | inch | mm    | inch  | mm    | inch  | mm | inch |                 |
| 15  | ½   | 120  | 4.75  | 82.6  | 3.25  | 22.3  | 0.88 | 22.50 | 7/8   | 35.0  | 1.38  | 7  | 0.25 | 4               |
| 20  | ¾   | 130  | 5.12  | 88.9  | 3.50  | 25.4  | 1.00 | 22.50 | 7/8   | 43.0  | 1.69  | 7  | 0.25 | 4               |
| 25  | 1   | 150  | 5.88  | 101.6 | 4.00  | 28.6  | 1.12 | 25.50 | 1     | 51.0  | 2.00  | 7  | 0.25 | 4               |
| 32  | 1¼  | 160  | 6.25  | 111.1 | 4.38  | 28.6  | 1.12 | 25.50 | 1     | 63.5  | 2.50  | 7  | 0.25 | 4               |
| 40  | 1½  | 180  | 7.00  | 123.8 | 4.88  | 31.8  | 1.25 | 28.50 | 1 1/8 | 73.0  | 2.88  | 7  | 0.25 | 4               |
| 50  | 2   | 215  | 8.50  | 165.1 | 6.50  | 38.1  | 1.50 | 25.50 | 1     | 92.0  | 3.62  | 7  | 0.25 | 8               |
| 65  | 2½  | 245  | 9.62  | 190.5 | 7.50  | 41.3  | 1.62 | 28.50 | 1 1/8 | 105.0 | 4.12  | 7  | 0.25 | 8               |
| 80  | 3   | 265  | 10.50 | 203.2 | 8.00  | 47.7  | 1.88 | 31.75 | 1¼    | 127.0 | 5.00  | 7  | 0.25 | 8               |
| 100 | 4   | 310  | 12.25 | 241.3 | 9.50  | 54.0  | 2.12 | 35.00 | 1 3/8 | 157.0 | 6.19  | 7  | 0.25 | 8               |
| 125 | 5   | 375  | 14.75 | 292.1 | 11.50 | 73.1  | 2.88 | 41.50 | 1 7/8 | 186.0 | 7.31  | 7  | 0.25 | 8               |
| 150 | 6   | 395  | 15.50 | 317.5 | 12.50 | 82.6  | 3.25 | 38.00 | 1 ½   | 216.0 | 8.50  | 7  | 0.25 | 12              |
| 200 | 8   | 485  | 19.00 | 393.7 | 15.50 | 92.1  | 3.62 | 45.00 | 1¾    | 270.0 | 10.62 | 7  | 0.25 | 12              |
| 250 | 10  | 585  | 23.00 | 482.6 | 19.00 | 108.0 | 4.25 | 51.00 | 2     | 324.0 | 12.75 | 7  | 0.25 | 12              |
| 300 | 12  | 675  | 26.50 | 571.5 | 22.50 | 123.9 | 4.88 | 54.00 | 2 1/8 | 381.0 | 15.00 | 7  | 0.25 | 16              |
| 350 | 14  | 750  | 29.50 | 635.0 | 25.00 | 133.4 | 5.25 | 60.50 | 2 3/8 | 413.0 | 16.25 | 7  | 0.25 | 16              |
| 400 | 16  | 825  | 32.50 | 704.8 | 27.75 | 146.1 | 5.75 | 66.50 | 2 5/8 | 470.0 | 18.50 | 7  | 0.25 | 16              |
| 450 | 18  | 915  | 36.00 | 774.7 | 30.50 | 162.0 | 6.38 | 73.50 | 2 7/8 | 533.0 | 21.00 | 7  | 0.25 | 16              |
| 500 | 20  | 985  | 38.75 | 831.8 | 32.75 | 177.8 | 7.00 | 80.00 | 2 7/8 | 584.0 | 23.00 | 7  | 0.25 | 16              |
| 600 | 24  | 1170 | 46.00 | 990.6 | 39.00 | 203.2 | 8.00 | 92.00 | 3 1/8 | 692.0 | 27.25 | 7  | 0.25 | 16              |
| 600 | 24  | 915  | 36.00 | 812.8 | 32.00 | 68.3  | 2.69 | 41.50 | 3 5/8 | 692.0 | 27.25 | 7  | 0.06 |                 |

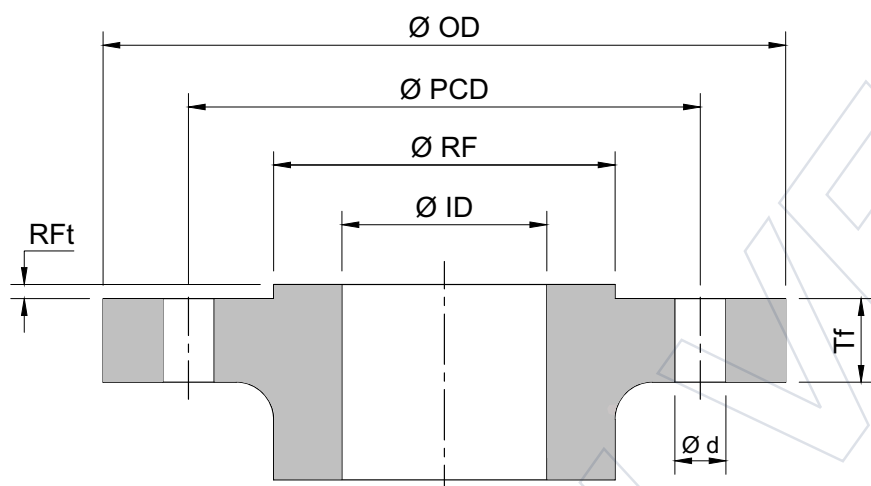

## ASME B16.5 | Class 2500

| $\varnothing ID$ |     | $\varnothing OD$ |       | $\varnothing PCD$ |       | $Tf$  |      | $\varnothing d$ |      | $\varnothing RF$ |       | $RFt$ |      | Number of holes |
|------------------|-----|------------------|-------|-------------------|-------|-------|------|-----------------|------|------------------|-------|-------|------|-----------------|
| DN               | NPS | mm               | inch  | mm                | inch  | mm    | inch | mm              | inch | mm               | inch  | mm    | inch |                 |
| 15               | ½   | 135              | 5.25  | 88.9              | 3.50  | 30.2  | 1.19 | 22.50           | ⅞    | 35.0             | 1.38  | 7     | 0.25 | 4               |
| 20               | ¾   | 140              | 5.50  | 95.2              | 3.75  | 31.8  | 1.25 | 22.50           | ⅞    | 43.0             | 1.69  | 7     | 0.25 | 4               |
| 25               | 1   | 160              | 6.25  | 108.0             | 4.25  | 35.0  | 1.38 | 25.50           | 1    | 51.0             | 2.00  | 7     | 0.25 | 4               |
| 32               | 1¼  | 185              | 7.25  | 130.2             | 5.12  | 38.1  | 1.50 | 28.50           | 1⅛   | 63.5             | 2.50  | 7     | 0.25 | 4               |
| 40               | 1½  | 205              | 8.00  | 146.0             | 5.75  | 44.5  | 1.75 | 31.75           | 1 ¼  | 73.0             | 2.88  | 7     | 0.25 | 4               |
| 50               | 2   | 235              | 9.25  | 171.4             | 6.75  | 50.9  | 2.00 | 28.50           | 1⅛   | 92.0             | 3.62  | 7     | 0.25 | 8               |
| 65               | 2½  | 265              | 10.50 | 196.8             | 7.75  | 57.2  | 2.25 | 31.75           | 1 ¼  | 105.0            | 4.12  | 7     | 0.25 | 8               |
| 80               | 3   | 305              | 12.00 | 228.6             | 9.00  | 66.7  | 2.62 | 35.00           | 1 ⅜  | 127.0            | 5.00  | 7     | 0.25 | 8               |
| 100              | 4   | 355              | 14.00 | 273.0             | 10.75 | 76.2  | 3.00 | 41.50           | 1 ⅝  | 157.0            | 6.19  | 7     | 0.25 | 8               |
| 125              | 5   | 420              | 16.50 | 323.8             | 12.75 | 92.1  | 3.62 | 48.00           | 1 ⅞  | 186.0            | 7.31  | 7     | 0.25 | 8               |
| 150              | 6   | 485              | 19.00 | 368.3             | 14.50 | 108.0 | 4.25 | 54.00           | 2 ⅛  | 216.0            | 8.50  | 7     | 0.25 | 8               |
| 200              | 8   | 550              | 21.75 | 438.2             | 17.25 | 127.0 | 5.00 | 54.00           | 2 ⅛  | 270.0            | 10.62 | 7     | 0.25 | 12              |
| 250              | 10  | 675              | 26.50 | 539.8             | 21.25 | 165.1 | 6.50 | 66.50           | 2 ⅝  | 324.0            | 12.75 | 7     | 0.25 | 12              |
| 300              | 12  | 760              | 30.00 | 619.1             | 24.38 | 184.2 | 7.25 | 73.50           | 2 ⅞  | 381.0            | 15.00 | 7     | 0.25 | 12              |